

## Firmware Update Procedure

**Step 1:** Click on the link below to go to the firmware page.

[https://www.dropbox.com/s/08io95e0uld84bs/DuPont\\_00\\_54.exe?dl=0](https://www.dropbox.com/s/08io95e0uld84bs/DuPont_00_54.exe?dl=0)

**Step 2:** Download the file to your computer.




**.exe files can't be previewed**

DuPont\_00\_54.exe · 187.65 KB




**Step 3:** Run DuPont\_00\_54.exe (actual file name will change with each firmware version) by double clicking the file.

You may get a warning message.

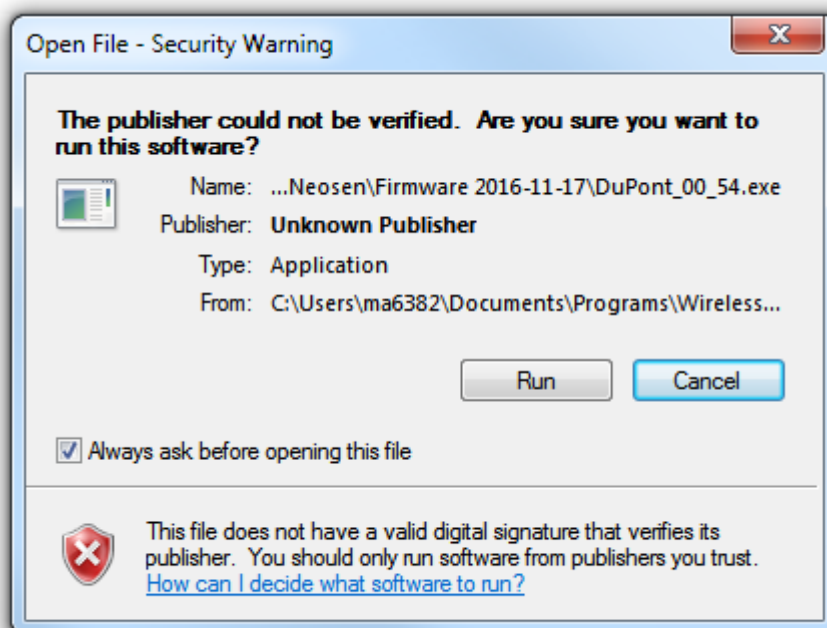

Click Run. A command line prompt window will open as shown below.

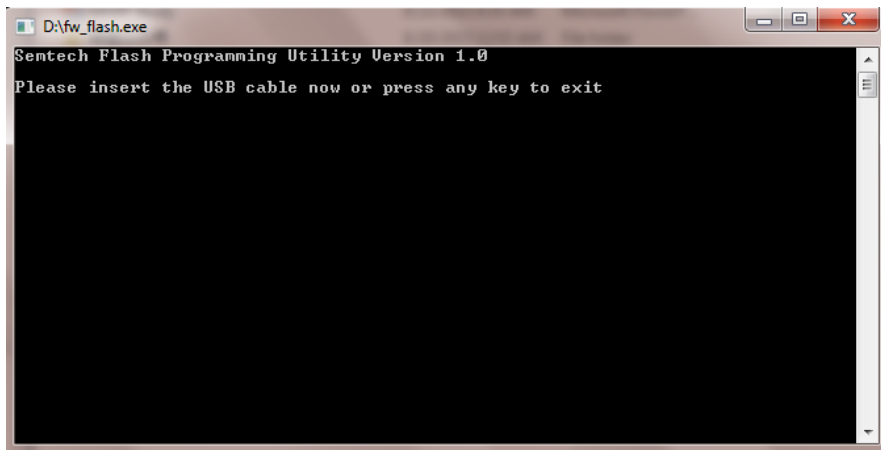


**Step 4:** With the power to the transmitter disconnected, connect the transmitter to a Windows computer with a micro USB cable. Plug the power back in. The software will detect the device and show current boot loader and firmware version. Then it will start the firmware update.

When it is successful to re-flash the firmware, it will show the result as below with GREEN string.

```
+-----+
|          CRC OK          |
+-----+
+-----+
|< New firmware version: 0.54 |
+-----+
```

**Remark: The firmware version and Boot loader version will not be the same as below screenshot , it is based on your current version.**

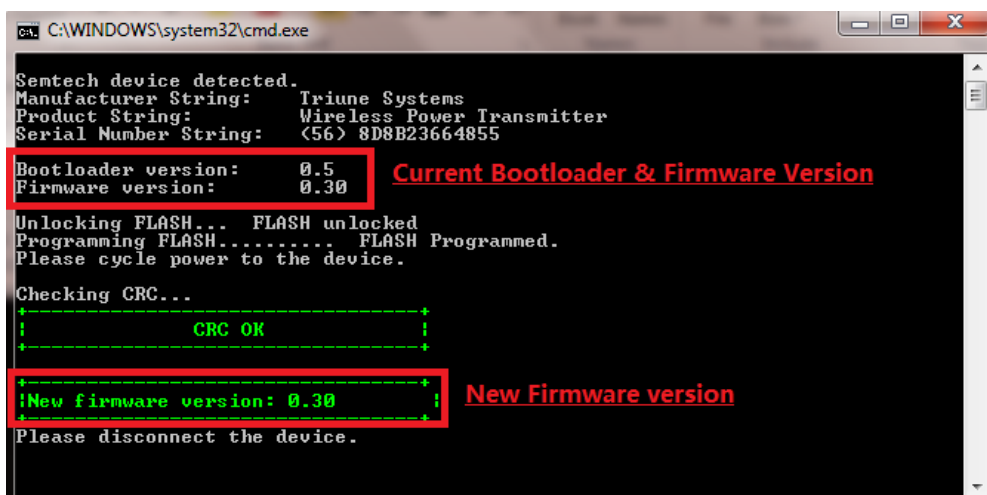

Multiple units can be updated in rapid succession. Do not quit the firmware updater. Simply disconnect the micro USB and power cables from the updated unit. Plug the micro USB cable into the next unit, then plug in the power cable.